

CURVASSI

MTX 32 / MTX 32H Bow Top Fencing Bending Machine

The Curvassi range of bending machines achieve fast and accurate bending in round and square tube, flat bar, round bar and square bar. Perfect for producing bow top fencing hoops, the machine can handle up to 3no of 12mm round bar at once. Available with either a manual vice, or increase efficiency and ease of use with a fully hydraulic vice to make it easier for the operator with automatic mode.

Tooling options can allow for making bow tops from up to 18mm solid round bar and square, or hollow tubes.

These Bow Top Fencing Bending Machines are ideally suited to production environments, as a 180° bend is performed within just four seconds.



**WATCH THE
MACHINE IN
ACTION**



**Curvassi MTX 32 /
MTX 32H**

Machine Features

- Built according to EC Safety Directives (CE-Mark Approved)
- Heavy Duty Construction
- Excellent bend quality
- Very Easy To Use
- Geared Motor Drive
- Foot Pedal Control
- Manual (MTX32) / Hydraulic Clamping Movement (MTX32H)
- Electrical Parts - Simens/Telemecanique
- Complete tooling service

Machine Options


- Manual Flip Length Stop System
- Hydraulic Vice on MTX32H
- Tooling for Hollow Tube / Solid Round or Square Bar






TOOLING



HYDRAULIC CONTROLLER

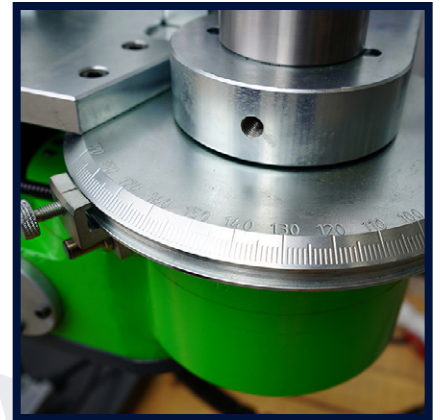

BEND DEGREES

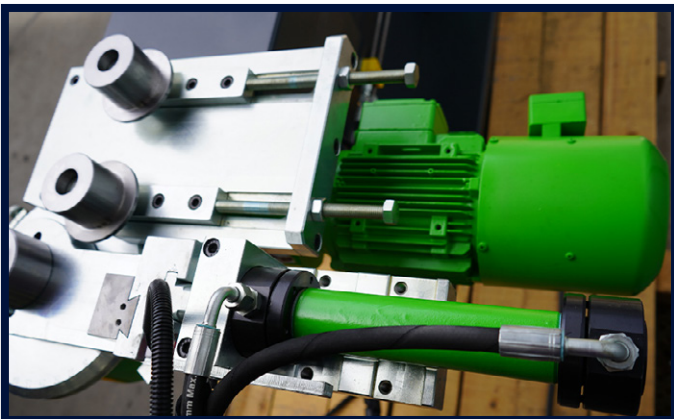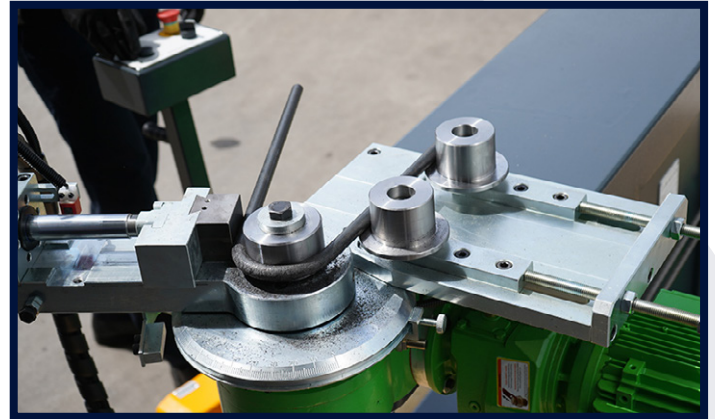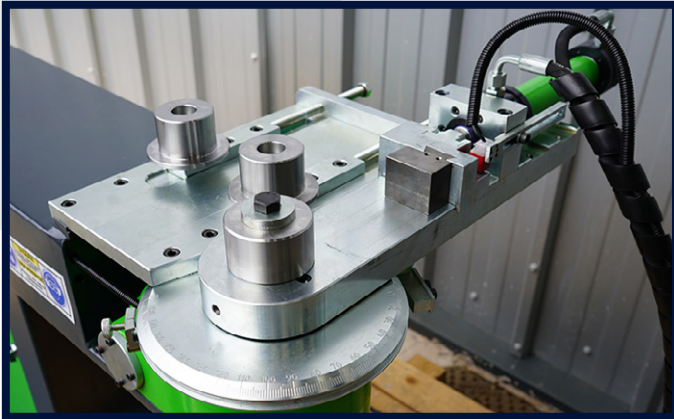

TECHNICAL SPECIFICATIONS

MODEL		MTX 32 (manual Vice)	MTX 32H (Hydraulic Vice)
Max Pipe Diameter	mm	32	32
Max Wall Thickness	mm	2	2
Max Solid Bar Diameter	mm	18	18
Max Bow- Top Capacity		3no of 12mm Bar	3no of 12mm Bar
Max Bending Radius	mm	300	275
Max Bending Angle	(°)	190	190
Bending Speed	(0/)	68	60
Vice Operation		Manual	Hydraulic
Motor	kw	2.2	2.2
Weight	Kg	280	400
Length	mm	1950	1950
Width	mm	850	1000
Height	mm	950	1050