



## WORK MATS

### PRIORITISING SAFETY AND WELL-BEING WITH GOLDCUT SAFETY MATTING

We understand that workplace safety and employee well-being are fundamental to operational efficiency and peace of mind. That's why we're proud to offer our new range of GoldCut safety matting solutions, designed to support safer, more comfortable working environments across a wide variety of industries.

From anti-fatigue and slip-resistant surfaces to specialist options for electrical protection and cable management, the GoldCut range offers a comprehensive selection tailored to suit virtually any setting. Options include rubber, vinyl and PVC protective flooring mats.

### WHY SAFETY MATTING MATTERS

Prolonged standing on hard, cold floors can result in fatigue, discomfort, and long-term health issues—problems that not only affect staff well-being but can also impact productivity and increase absenteeism. The risk of slips, trips, and falls only compounds the issue.

**GoldCut safety matting** is engineered to meet these challenges head-on, with solutions suitable for everything from light-duty areas to high-traffic industrial zones. When it comes to workplace safety, if you need it—we've got it.



### KEY BENEFITS



#### IMPROVED SAFETY

Designed to reduce the risk of workplace accidents by providing reliable non-slip surfaces in critical areas.



#### ENHANCED COMFORT

Anti-fatigue properties support employee well-being by reducing physical strain for those standing over long periods.



#### INDUSTRIAL-GRADE DURABILITY

Resistant to oils, chemicals, and extreme temperatures, making them ideal for even the harshest environments.



#### NOISE CONTROL

































Helps reduce background noise by dampening sound in busy workspaces.



#### BOOSTED PRODUCTIVITY

Minimises health-related complaints and accidents, contributing to a healthier, more efficient workforce.

## FEATURES GLOSSARY

	Slip Resistance		Water Absorbent		Heavy Area		Impact Resistance
	Anti Fatigue		Crush Resistance		Made from 100% Recycled Materials		Medical Area
	Wear Resistance		Soil Resistance		Non-Conductive (Electrical)		Non-Conductive (HV Electrical)
	Anti Microbial		Chemical Resistance		Non-Static (ESD)		Oily and Greasy Area
	Connectable		Cut To Length		UV Resistant		Washable to 30°C
	Cut To Size		Decontamination Prevention		Washable up to 40°C		Washable to 50°C
	Disability Friendly		Dry Area		Washable up to 60°C		Wet Zone
	Flame Retardant		Forklifts		Welding Area		Wheeled Area

We have given effectiveness ratings from 1 (low) to 3 (high) to the six features highlighted above, as detailed throughout this document. For more information on these, see below;

### SLIP RESISTANCE



ASTM C1028-89 & DIN-E-51130, 51097. These tests measure the force needed for load slippage on the material's surface. The coefficient of friction ratio, obtained by dividing force by weight, indicates slip resistance. The higher performance rating means better coefficient of friction and greater slip resistance.

### ANTI-FATIGUE PROPERTIES



ASTM D3574. This is a simple deflection/compression test which gives a rating depending on the difference in height of a mat before and during the time a weight has been placed on it. The greater the difference, the better the anti-fatigue properties and overall performance.

### WEAR RESISTANCE



ASTM D3844-92. An accelerated wear test involves measuring the complete loss of material weight after subjecting it to 5000 cycles under an abrasive wheel.

### SOIL RESISTANCE



The higher the rating, the greater the weight of dust and dirt is collected in the particular mat. This capability is greatly enhanced by the design and quality of the materials used in the manufacture of the mats.

### CRUSH RESISTANCE




This test simulates the impact when weight is applied. The higher the rating, the more resistant the mat.

### WATER ABSORBENT



The rating reflects the amount of moisture per square metre the product can absorb.

GOLDCUT RIBBED


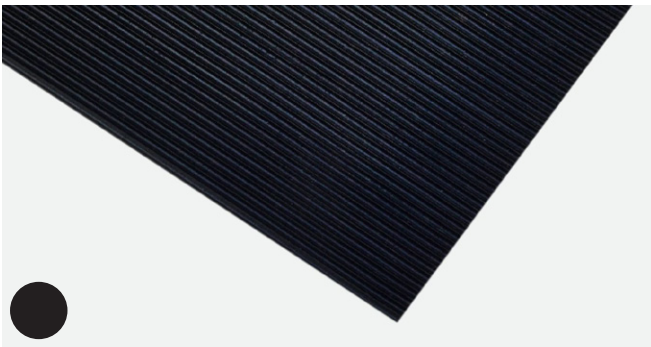


GoldCut Ribbed Mat is a low cost, surface covering suitable for use in a wide variety of applications. The ribbed surface provides excellent grip for both floor surfaces and work areas alike. It is easy to cut and can be laid loose or glued/ fixed down for a more permanent solution. Available in two different thicknesses, 3mm and 6mm, and three widths: 90cm, 100cm and 120cm, Rubber Rib Mat is suitable for medium to heavy duty use.

Low-cost surface covering, suitable for industrial flooring, aisles, work benches, vehicle interiors, kennels, livery enclosures and animal grooming areas.

VARIANTS AVAILABLE

SKU	Description	Thickness (mm)	Weight (kgs)
GR39IBL	90cm x 10m Blk	3	26.1
GR69IBL	90cm x 10m Blk	6	76
GR6100BL	100cm x 10m Blk	6	83
GR6100BL	120cm x 10m Blk	3	35
GR6122BL	120cm x 10m Blk	6	97

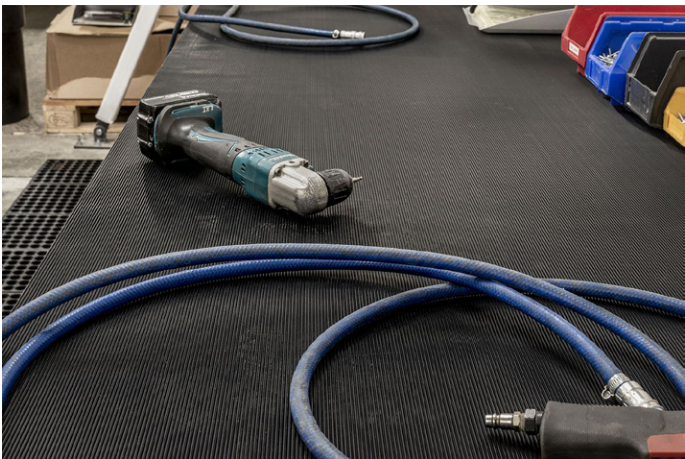

KEY FEATURES

- Low-cost surface covering
- 100% rubber with fine ribbed surface for sure footing and easy cleaning
- Material: 100% rubber
- Available in two thicknesses: 3mm and 6mm and three widths: 90cm, 100cm and 120cm
- Available in 10m length rolls


SPECIFICATION

Slip Resistance	Great Slip Resistance to Level 2
Anti-Fatigue	Good anti-fatigue properties, resistant to level 1
Wear Resistance	Great wear resistance to level 2, suitable for medium to high footfall
Cut to Length	Yes
Cut to Size	Yes
Disability Friendly	Yes, the low profile makes it suitable for wheelchair users
Dry Area	Yes
Wheeled area	Yes, the low profile makes it suitable for light wheeled traffic
Environment	Suitable for indoor and outdoor use
Impact Resistance	Yes
Product Testing	<ul style="list-style-type: none"><li>• Hardness Shore A <math>\pm 5</math> 65° ISO 7619-1</li><li>• SG (g/cm<sup>3</sup>) 1.50 ISO 2781</li><li>• Tensile (N/mm<sup>2</sup>) 2.5 ISO 37</li><li>• Elongation % 200 ISO 37</li></ul>
Sustainability	<ul style="list-style-type: none"><li>• REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li><li>• Contributes to a cleaner environment by reducing the need to use cleaning chemicals</li></ul>
Cleaning	Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of hard detergents is not recommended





GOLDCUT ANTI-SLIP

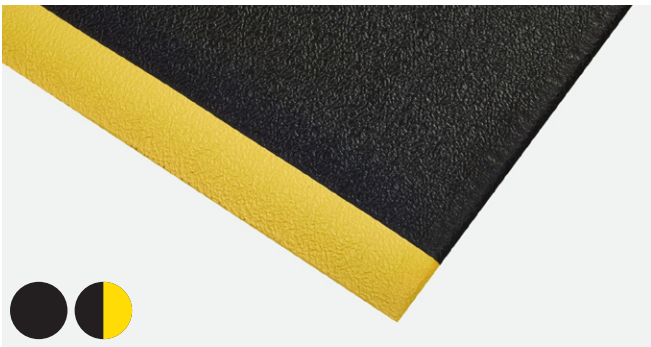


GoldCut Anti-Slip is a light duty anti-fatigue mat designed for use in a wide variety of dry environments.

The mat is manufactured from 9.4mm thick closed-cell vinyl foam, and features a pebble effect surface for added traction and grip. With bevel edges to all sides, the GoldCut Anti-Slip is available in a range of widths that can be cut to size for the perfect fit.

Ideal for manufacturing plants, assembly lines, picking and packing workstations, logistics warehouses, industrial and laboratory environments and service counters. GoldCut Anti-Slip is also perfect for kennels, livery enclosures and animal grooming areas where added comfort and floor protection is needed.

VARIANTS AVAILABLE

SKU	Description	Thickness (mm)	Weight (kgs)
GA2436BL/BY	60cm x 90cm Blk / BlkYw	9.4	1.8
GA260BL/BY	60cm x 18.3m Blk / BlkYw	9.4	35
GA3660BL/BY	90cm x 150cm Blk / BlkYw	9.4	4.5
GA310BL/BY	90cm x 300cm Blk / BlkYw	9.4	8.7
GA360BL/BY	90cm x 18.3m Blk / BlkYw	9.4	53
GA460BL/BY	120cm x 180cm Blk / BlkYw	9.4	6.9
GA460BL/BY	120cm x 18.3m Blk / BlkYw	9.4	70

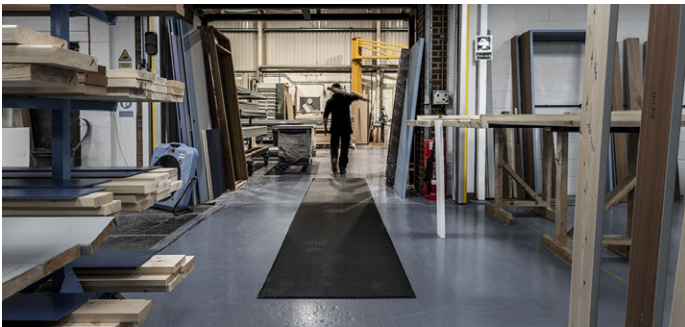

Suitable for indoor use





KEY FEATURES

- Light-duty anti-fatigue mat
- Made from closed-cell vinyl foam with pebble surface for added traction and grip
- Yellow edged option available for added safety awareness
- Anti-trip bevel edges for added safety
- Product can be cut to size to fit any work area
- Material: Microcellular vinyl
- Overall height: 9.4mm
- Please note, the width and length can be +/- 2%
- Also available as 18.3m Rolls in all widths.

SPECIFICATION

Slip Resistance	Great Slip Resistance to Level 2
Anti-Fatigue	Great anti-fatigue properties, resistant to level 2
Wear Resistance	Good wear resistant to level 1, suitable for low to medium footfall
Anti Microbial	Yes
Cut to Length	Yes
Cut to Size	Yes
Disability Friendly	Yes, the mats have ramped edges making them suitable for wheelchair users
Dry Area	Yes
Environment	Suitable for indoor use
Impact Resistance	Yes
Product Testing	<ul style="list-style-type: none"><li>• Yellow borders comply with OSHA code 1910-144</li></ul>
Sustainability	<ul style="list-style-type: none"><li>• REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li></ul>
Cleaning	Wash with cold water with a mild detergent. The use of hard detergents is not recommended.



# GOLDCUT PREMIUM ANTI-SLIP




GoldCut Premium Anti-Slip is a premium anti-fatigue mat suitable for heavy duty dry industrial and manufacturing environments.

The durable vinyl surface is bonded to a resilient, thick, ergonomic foam that provides ultimate standing comfort, whilst the diamond top design and non-slip backing, offers exceptional slip resistance and eliminates mat movement. GoldCut Premium Anti-Slip is also available with a yellow edge for added safety awareness.

Perfect for warehousing and distribution facilities, industrial and manufacturing environments along with packing and production lines.

## VARIANTS AVAILABLE

SKU	Description	Thickness (mm)	Weight (kgs)
GP2436BL/BY	60cm x 90cm Blk / BlkYw	14.3	4.1
GP275BL/BY	60cm x 23m Blk / BlkYw	14.3	106
GP3660BL/BY	90cm x 150cm Blk / BlkYw	14.3	10
GP310BL/BY	90cm x 300cm Blk / BlkYw	14.3	21
GP320BL/BY	90cm x 6m Blk / BlkYw	14.3	42
GP375BL/BY	90cm x 23m Blk / BlkYw	14.3	153
GP475BL/BY	120cm x 23m Blk / BlkYw	14.3	215

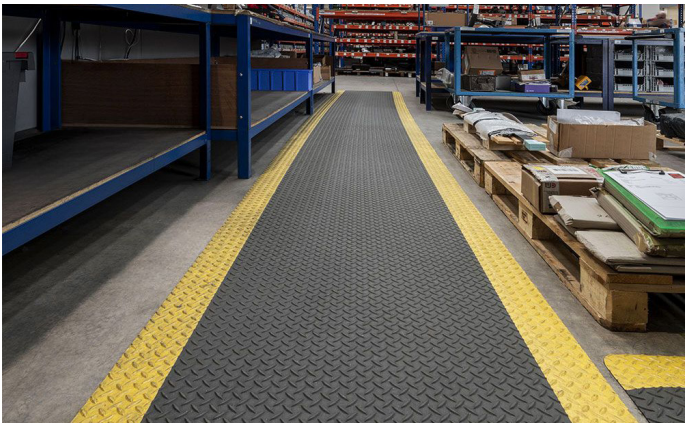

## KEY FEATURES

- Premium anti-fatigue mat suitable for dry heavy-duty use
- Slip resistant vinyl surface bonded to ergonomic foam for ultimate worker comfort. The non-slip backing ensures stability and prevents mat movement
- Resistant to common fluids, most chemicals and is non-flammable
- Yellow edge option for added safety awareness
- Material: Durable vinyl surface bonded to a resilient closed-cell vinyl sponge
- Overall height: 14.3mm
- Please note, the width and length can be +/- 2%
- Also available as rolls in all widths.


## SPECIFICATION

Slip Resistance	Excellent anti-slip protection, resistant to level 3
Anti-Fatigue	Excellent anti-fatigue properties, resistant to level 3
Wear Resistance	Excellent wear resistance to level 3, suitable for heavy footfall
Anti Microbial	Yes
Chemical Resistance	The vinyl surface is resistant to common fluids, most chemicals and is non-flammable
Cut to Length	Yes
Cut to Size	Yes
Disability Friendly	Yes, the mats have ramped edges making them suitable for wheelchair users
Dry Area	Yes
Heavy Area	Yes
Wheeled Area	Yes
Environment	Suitable for indoor use
Impact Resistance	Yes
Sustainability	<ul style="list-style-type: none"><li>• REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li></ul>
Cleaning	Wash with water and a mild detergent, or use a vacuum cleaner





## GOLDCUT DELUXE

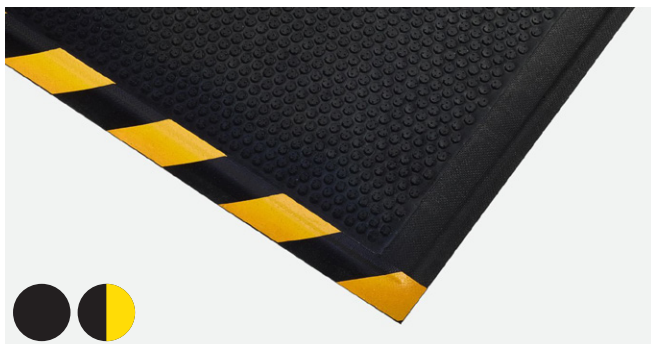

GoldCut Deluxe is a heavy-duty anti-fatigue mat that features a 12.7mm dense foam cushion encapsulated in nitrile rubber, making it suitable for both wet and dry environments.

Offering exceptional anti-fatigue benefits, the gripper backing minimises movement on the floor, whilst the textured surface and bevelled borders maximise safety. GoldCut Deluxe is a totally versatile mat, is welding safe and resistant to chemicals, animal fats, machine grease/oils and petroleum products.

Ideal for use in heavy duty industrial applications including welding areas and static sensitive areas.

### VARIANTS AVAILABLE

SKU	Description	Thickness (mm)	Weight (kgs)
GD2436BL/BY	58cm x 85cm Blk / BlkYw	12.7	4.9
GD3660BL/BY	85cm x 150cm Blk / BlkYw	12.7	11.4




### KEY FEATURES

- Heavy duty anti-fatigue mat with bevelled borders and gripper backing for added safety
- 12.7mm dense foam cushion and nitrile rubber surface for exceptional anti-fatigue qualities
- Welding safe; grease/oil/petroleum proof; chemical resistant; ESD rating of electrically conductive
- Mats surface is penetration proof and borders will not crack or curl
- Safe for use in computer rooms and other static sensitive areas
- Material: Nitrile rubber
- Overall height: 12.7mm

### SPECIFICATION

<b>Slip Resistance</b>	Excellent anti-slip protection, resistant to level 3
<b>Anti-Fatigue</b>	Excellent anti-fatigue properties, resistant to level 3
<b>Wear Resistance</b>	Excellent wear resistance to level 3, suitable for heavy footfall
<b>Chemical Resistance</b>	Yes
<b>Disability Friendly</b>	Yes, the mats have ramped edges making them suitable for wheelchair users
<b>Dry Area</b>	Yes
<b>Wet Area</b>	Yes
<b>Oil and Grease</b>	Yes
<b>Heavy Area</b>	Yes
<b>Welding Area</b>	Yes
<b>Environment</b>	Suitable for indoor and outdoor use
<b>Flame Retardant</b>	Yes
<b>Product Testing</b>	<ul style="list-style-type: none"><li>• Certified high-traction by the National Floor Safety Institute (NFSI)</li><li>• DUROMETER: 65</li><li>• Tensile strength: 1600 PSI</li><li>• Textured Nitrile Rubber Surface for superior slip resistance ASTM C 1028-96</li><li>• Static Coefficient of Friction: Dry:-.92 Wet:-.86</li><li>• Electrostatic Propensity of Carpets: Maximum Negative 0,7kv</li><li>• Passes Flammability Standard DOC-FF-1-70. Passes ATTCC Test Method 134-1996</li></ul>
<b>Sustainability</b>	<ul style="list-style-type: none"><li>• REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li></ul>
<b>UV Resistant</b>	Yes
<b>Cleaning</b>	Rinse with a hose or pressure washer. Hang or lay the mat flat to dry

## GOLDCUT FLEX

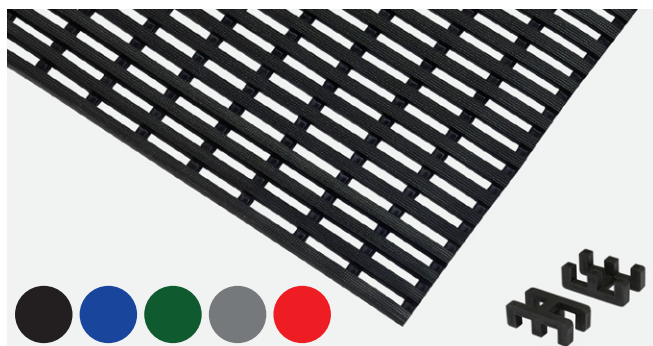

GoldCut Flex is the ultimate multi-use slip resistant mat designed to withstand extensive foot traffic. Interflex can be used industrial, construction and catering establishments where slip hazards exist.

The strong, non-porous PVC with channelled underbars automatically self-drain even when faced with large amount of water, oil, grease, or chemicals. The mats embossed surface provides exceptional grip whilst the anti-microbial and anti-fungal properties ensures excellent hygiene. GoldCut Flex also offers excellent sound absorption.

Connector clips are available for side or end joining to create the perfect shape or fit.

Perfect for all wet environments including industrial sites and workplaces where free draining flooring are required.

### VARIANTS AVAILABLE

SKU	Description	Thickness (mm)	Weight (kgs)
GF2433BL/BU/GN/GY/RD	60cm x 10m Blk / Blue / Green / Grey / Red	11	33
GF3233BL/BU/GN/GY/RD	80cm x 10m Blk / Blue / Green / Grey / Red	11	44
GF3993BL/BU/GN/GY/RD	100cm x 10m Blk / Blue / Green / Grey / Red	11	55



### KEY FEATURES


- Ultimate multi-use slip resistant mat, designed to withstand extensive foot traffic
- Two-layer construction and channelled underbars automatically self-drain when faced with large amounts of water, oil, grease, or chemicals
- The mats embossed surface provides exceptional grip, whilst the anti-microbial and anti-fungal properties ensure excellent hygiene
- Easy to cut and contours to uneven surfaces
- UV resistant
- Excellent sound absorption
- Resistant to most acids, alkaline and oils
- Connector clips for side or end joining
- Material: Flexible PVC. 100% recyclable
- Overall height: 11mm
- Please note, the width and length can be +/- 2%

### SPECIFICATION

<b>Slip Resistance</b>	Excellent Slip Resistance to Level 2
<b>Anti-Fatigue</b>	Great anti-fatigue properties, resistant to level 2
<b>Wear Resistance</b>	Excellent wear resistant to level 3, suitable for heavy footfall
<b>Water Resistance</b>	The two-layer construction and channelled underbars allows water to self-drain
<b>Anti Microbial</b>	Yes
<b>Chemical Resistance</b>	Yes, the mats can withstand chemicals, acids, and commercially available caustic solutions
<b>Connectable</b>	Yes, mats are connectable to create any shape or fit (sold seperately)
<b>Cut to Length</b>	Yes
<b>Cut to Size</b>	Yes
<b>Dry Area</b>	Yes
<b>Wet Area</b>	Yes
<b>Oil and Grease</b>	Yes
<b>Medical Area</b>	Yes
<b>Environment</b>	Suitable for indoor and outdoor use
<b>Flame Retardent</b>	Yes
<b>Impact Resistance</b>	Yes
<b>Product Testing</b>	<ul style="list-style-type: none"> <li>• Slip Resistance - DIN 51097: Classification C</li> <li>• ASTM F 1677 - Dry/Wet: 0.9/0.7</li> <li>• Fire: EN13501-1 : 2007 - Cfl - S1</li> </ul>
<b>Sustainability</b>	<ul style="list-style-type: none"> <li>• REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li> </ul>
<b>Temp. Resistance</b>	-23°C to +60°C
<b>UV Resistance</b>	Yes
<b>Cleaning</b>	Can be hand cleaned, machine and steam cleaned.



## GOLDCUT WORK

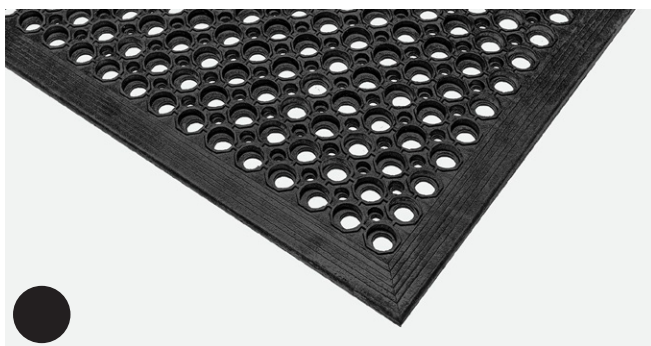

GoldCut Work is a fantastic multi-purpose hardwearing mat designed to offer great anti-fatigue benefits, whilst the anti-slip surface and bevels on all four sides provide added worker comfort and safety.

The honeycomb structure has also been specially manufactured to easily trap swarf and allow liquids to disperse quickly, providing a safe and secure work surface.

Perfect for industrial, construction and manufacturing environments, production and assembly lines, workshops, distribution centres and individual workstations and custom work platforms. An all round highly effective mat that can be used both inside and outside.

### VARIANTS AVAILABLE

SKU	Description	Thickness (mm)	Weight (kgs)
GW2436BL	60cm x 90cm Blk	13	3.5
GW3248BL	80cm x 120cm Blk	13	6.25
GW3660BL	91cm x 150cm Blk	13	9.5
GW310BL	91cm x 3m Blk	13	22
GW320BL	91cm x 6m Blk	13	44



### KEY FEATURES

- Multi-purpose hard-wearing mat, provides excellent anti-fatigue benefits
- Anti-slip surface and bevelled edges on all four sides ensure worker comfort and safety
- Honeycomb design traps swarf and disperses liquids quickly, leaving the surface clear
- Available in a range of sizes to suit any environment, including in 3 or 6m rolls
- Material: Natural and recycled rubber
- Overall height: 13mm

### SPECIFICATION

<b>Slip Resistance</b>	Excellent slip resistance to level 3
<b>Anti-Fatigue</b>	Great anti-fatigue properties, resistant to level 2
<b>Wear Resistance</b>	Excellent wear resistance to level 3, suitable for heavy footfall
<b>Water Absorbent</b>	Open top design allows liquids to self-drain
<b>Crush Resistant</b>	Great crush resistance to level 2
<b>Soil Resistant</b>	The surface pattern allows dirt and waste to be trapped easily, resistant to level 2
<b>Anti Microbial</b>	Yes
<b>Cut to Length</b>	Yes
<b>Cut to Size</b>	Yes
<b>Disability Friendly</b>	Yes, the mats have ramped edges making them suitable for wheelchair users
<b>Dry Area</b>	Yes
<b>Wet Area</b>	Yes
<b>Heavy Area</b>	Yes
<b>Wheeled Area</b>	Yes
<b>Environment</b>	Suitable for indoor and outdoor use
<b>Impact Resistance</b>	Yes
<b>Product Testing</b>	<ul style="list-style-type: none"><li>• Tensile strength: 2-2.5 Mpa</li><li>• Hardness: 55+ Shore A</li><li>• DIN abrasion loss mm3: 250-300</li><li>• Elongation at break: 200-250%</li></ul>
<b>Sustainability</b>	<ul style="list-style-type: none"><li>• Nature friendly, biodegradable and recyclable</li><li>• REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li><li>• Contributes to a cleaner environment by reducing the need to use cleaning chemicals</li></ul>
<b>Temp. Resistance</b>	-20°C to +130°C
<b>Cleaning</b>	Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended



## GOLDCUT ABSORB



GoldCut Absorb is an anti-fatigue mat designed for combined use with a replaceable sorbent.

Manufactured from top quality nitrile rubber, this mat is the perfect option for use in medium duty, wet or oily industrial environments.

The rough gripper surface and raised ramped edges hold the sorbent firmly in place, whilst the bubble design and moulded air pockets provide buoyancy for anti-fatigue relief.

GoldCut Absorb is supplied with one sorbent infill, additional refills can be purchased.

For placement in manufacturing plants, production lines, assembly lines, in front of CNC machines, metal working, individual workstations and custom work platforms.

### VARIANTS AVAILABLE

SKU	Description	Thickness (mm)	Weight (kgs)
GAB3660	87cm x 157cm Blk mat	12.7	9.3
GA3660R	80cm x 150cm Grey - Sorbent Refill	N/A	0.4



### KEY FEATURES

- Anti-fatigue mat designed for combined use with replacement sorbent
- Made from top quality nitrile rubber making it suitable for medium duty, wet or oily industrial environments
- Captures liquids, oil and grease for a clear and safe surface
- Rough gripper surface and raised ramps securely hold sorbent in place
- Bubble design and moulded air pockets provide buoyancy for anti-fatigue relief
- Replaceable refills available
- Material: 100% nitrile rubber
- Overall height: 12.7mm

### SPECIFICATION

<b>Slip Resistance</b>	Excellent slip resistance to level 3
<b>Anti-Fatigue</b>	Great anti-fatigue properties, resistant to level 2
<b>Wear Resistance</b>	Excellent wear resistance to level 3, suitable for heavy footfall
<b>Water Absorbent</b>	Open top design allows liquids to self-drain
<b>Crush Resistant</b>	Great crush resistance to level 2
<b>Soil Resistant</b>	The surface pattern allows dirt and waste to be trapped easily, resistant to level 2
<b>Anti Microbial</b>	Yes
<b>Cut to Length</b>	Yes
<b>Cut to Size</b>	Yes
<b>Disability Friendly</b>	Yes, the mats have ramped edges making them suitable for wheelchair users
<b>Dry Area</b>	Yes
<b>Wet Area</b>	Yes
<b>Heavy Area</b>	Yes
<b>Wheeled Area</b>	Yes
<b>Environment</b>	Suitable for indoor and outdoor use
<b>Flame Retardent</b>	Yes
<b>Product Testing</b>	<ul style="list-style-type: none"><li>• Tensile strength: 2-2.5 Mpa</li><li>• Hardness: 55+ Shore A</li><li>• DIN abrasion loss mm<sup>3</sup>: 250-300</li><li>• Elongation at break: 200-250%</li></ul>
<b>Sustainability</b>	<ul style="list-style-type: none"><li>• Nature friendly, biodegradable and recyclable</li><li>• REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)</li><li>• Contributes to a cleaner environment by reducing the need to use cleaning chemicals</li></ul>
<b>Temp. Resistance</b>	-20°C to +130°C
<b>Cleaning</b>	Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt.



#### **PRODUCT CARE AND MAINTENANCE**

Effective care and maintenance play a pivotal role in maximising the lifespan and usability of our products. Regular upkeep not only preserves their aesthetic appeal but also sustains their functional integrity over time.

By adhering to recommended maintenance practices, such as routine cleaning and inspection, the lifespan of our products can be significantly prolonged. This proactive approach not only enhances safety but also minimises the need for premature replacements ultimately contributing to cost savings and promoting environmental responsibility.