

SELMACHTM
MACHINERY

Making Metal Work




PRT Flat-Bed / Tube Combination Laser

The RVD PRT Combination Laser features a fully enclosed protective cover, an exchange shuttle table, and a rotary attachment for tube cutting. It is capable of processing both metal sheets and tubes on the same machine.

The advanced CNC laser cutting system, combined with high-quality components and a meticulous assembly process, ensures safe and stable operation, exceptional cutting efficiency, and high precision.



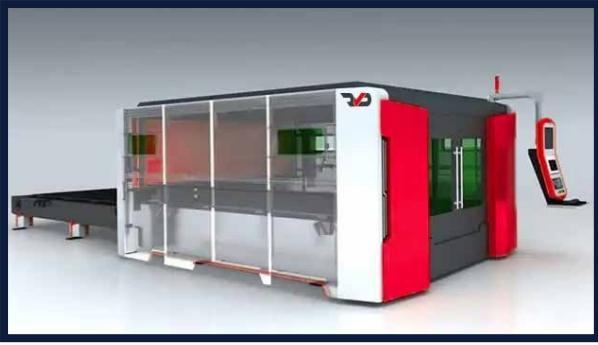


FULLY ENCLOSED DESIGN

Given the Class 4 Laser in use, as per UKCA and CE Standards the machine is fully enclosed for operator safety - enclosing both the plate cutting table and the tube cutting rotary attachment.



AUTOMATIC LIFT DOOR

- Prevents Laser Radiation Leakage
- Creates a closed cutting environment for easy dust and smoke removal
- Dust-free cutting of highly reflective materials

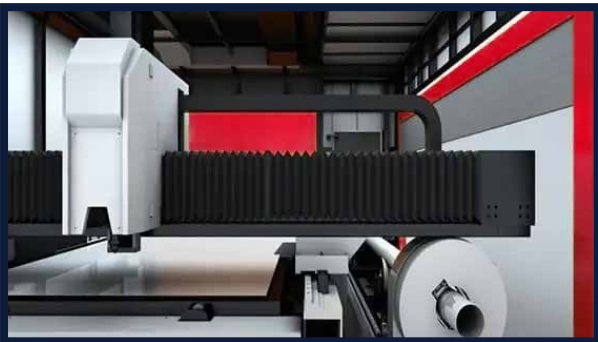

ONE GANTRY, TWO PROCESSES

The one gantry and laser torch works across the flat bed exchange table and tube laser, saving time, space and costs.



HEAVY-DUTY PLATE WELDED BASE

The thickness of the steel plate is up to 18 mm. The machine tool has better rigidity and is less prone to deformation. The stability of the machine tool is higher, the weight of the equipment is heavier, and the overall service life is increased.



Machine Features

- High performance Max Photonics Laser Source
- Fibre optic beam delivery system
- BOCI Autofocus Laser Cutting Head
- High strength, rigid gantry design to ensure high accuracy and allow high acceleration
- High precision class alpha rack and pinion drive motion system
- Shuttle Exchange Table
- Applicable tube types : Round tube, square tube, rectangular tube, oval tube, D-shaped steel, T-shaped steel, H-shaped steel, channel steel, angle steel, etc.
- CE compliant complete machine enclosure and light barrier system
- CupCut / TubePro CAD/CAM Software
- FSCUT 3000 CNC Controller

Optional Equipment

- 3m / 6m Tube Cutting Capacity
- Filtration & Extraction

AUTOMATIC

TECHNICAL SPECIFICATIONS

PART		PRT 3015
Laser Power	kW	3 or 6
Processing Surface / Max Sheet Size (L x W)	mm	1500 x 3000
CNC Control		CypCutE / CypTube
Laser Head		BOCI
Position Accuracy X, Y and Z Axis	mm	±0.05
Repeat Position Accuracy X, Y and Z Axis	mm	±0.03
Maximum Position Speed of X and Y Axis	mm/min	80
Acceleration	G	1.2G
Max Load of Shuttle Table	kg	900
X Axis Travel	mm	3,050
Y Axis Travel	mm	1,535
Z Axis Travel	mm	280
Front Chuck		Automatic (Pneumatic Type)
Feeding Chuck		Automatic (Pneumatic Type)
Tube Diameter	mm	Round - Ø20 - 240 Square - 240 x 240
Tube Length	mm	6,000
Length	mm	9,500
Width	mm	6,500
Height	mm	2,460
Weight	kg	7,500

KEY COMPONENTS

COMPONENT	BRAND
Fibre Laser Source	Max Photonics
CNC Controller	FSCUT
CAM/CAD software Flex3D	CypCutE, CypTube
Tube nesting cut for option	TubePro & TubesT
Servo motor and driver	Yaskawa
Rack and Pinion	YYC
Linear Guide	Hiwin
Laser Head	BOCI
Gas Proportional Valve	SMC
Reduction Gear Box	Desboer
Chiller	Tong Fei
Rotate Chuck System	RVD
Automatic Support	RVD
Automatic Bundle Loader	RVD
Automatic Unloading	RVD
Electrical Components	Schneider

LASER SOURCE	kW	3	6
Cutting Capacity - Mild Steel	mm	22	25
Cutting Capacity - Stainless Steel	mm	12	20
Cutting Capacity - Aluminium	mm	10	16
Cutting Capacity - Brass	mm	8	14
Cutting Capacity - Copper	mm	6	10
Cutting Capacity - Galvanised Steel	mm	8	14